

GYPSUM PLASTERBOARD
DRYWALL CONSTRUCTION



FIRE

Application

The GYPFOR FIRE plasterboard is designed for use in interior wall and ceiling applications. Should not be used in applications where temperatures exceed 52 °C for extended periods, or in areas with extreme humidity.

Board with enhanced level of fire resistance for applications with special fire protection requirements. Suitable for:

- Suspended Ceilings
- Partition walls
- Existing wall linings

Physical characteristics

Board type
EN 520 F

Core
Non-combustible, dimensionally stable, inert gypsum

Paper
100% recycled; pink color

Longitudinal Edge
Tapered edge (TE)


Transversal Edge
Square edge (TE)

Label colour
Black

Produced with special additives for improved fire resistance. Gypsum board primer should be applied before painting or adding any textural material.



Technical specifications

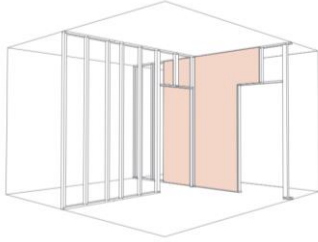		Type	FIRE	
Dimensional tolerances			F	EN 520
Thickness:	±0,5 mm	Reaction to fire	A2-s1,d0 (B)	EN 520
Width:	+0/-4 mm	Thermal conductivity	$W/(m \text{ } ^\circ C)$	0.25
Length:	+0/-5 mm	Density	kg/m^3	≥ 800
Application		Dimensions		
Wall Linings		Thickness	mm	12.5, 15
		Width	mm	1200
		Lengths	mm	Several

Approximate weight


Board thickness 12,5 mm	kg/m^2	10.20
Board thickness 15 mm	kg/m^2	12.20

Breaking loads

		EN 520	
Thickness		12.5	15
Longitudinal	N	≥550	≥650
Transverse	N	≥210	≥250


Edge

Tapered Edge – TE




This plate has a non-combustible core and additives that improve its mechanical resistance to fire, making it suitable systems with special fire protection requirements.


Sizes (mm)

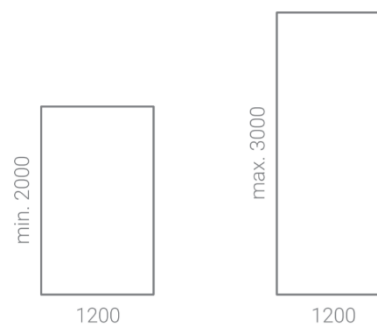

Ceilings



Partitions



To maintain GYPFOR FIRE performance integrity, the drywall plasterboard should be protected from exposure to adverse conditions during storage and construction.