



## Mannok Therm IsoCavity - Full Fill Cavity Board

Mannok Therm IsoCavity board is one of the range of PIR (polyisocyanurate) foam boards we manufacture for the insulation of floors, walls and roofs.

### Benefits of Mannok Therm IsoCavity

- Mannok Therm IsoCavity rigid insulation is well suited to use in cavity walls on new build projects.
- Mannok IsoCavity is manufactured in a range of thicknesses to suit standard cavity wall widths (i.e. 100mm, 125mm & 150mm) and is also designed to suit standard wall tie spacing.
- IsoCavity has a low thermal conductivity, minimising the thickness required to achieve the design U-value.
- IsoCavity has good dimensional tolerances, enabling boards to be tightly butted to form a continuous layer of insulation.
- Designed to utilize the full width of cavity. No residual cavity required.

### Composition

Mannok Therm IsoCavity consists of a core of PIR foam with bonded foil facings. The gas filled cells give IsoCavity its high thermal performance and strength while the foil facings maximises performance.


### Thermal Performance

Mannok Therm IsoCavity has a thermal conductivity of 0.022W/mK, making it one of the most effective rigid board insulations available.

### Environmental

Mannok PIR Insulation has an ozone depletion potential (ODP) of zero and a Global Warming Potential (GWP) of less than 5, certified to ISO 14001 - Environmental Management Systems.

### Applications

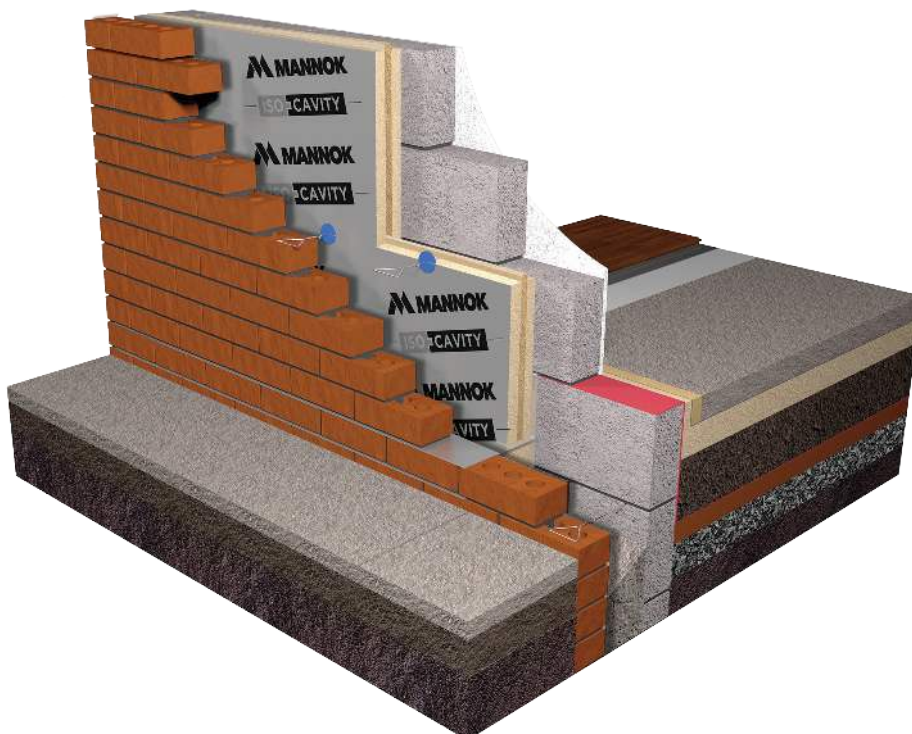

Cavity walls: IsoCavity in masonry - Full Fill

## CE Marking



Construction Products Regulation (CPR) requires mandatory CE marking for all thermal insulation products. Mannok Therm IsoCavity boards are CE marked to harmonised standard EN 13165. The Declaration of Performance, 014/23, is available on our website link. (see bottom of page for link)

## Delivery & Storage

Mannok PIR Insulation boards are shrinkwrapped in clear polyethylene for delivery to site. Each pack is labelled with the product description, product characteristics, manufacturer's name and brand name, quantity per pack, and any identification marks.

## Biological / Chemical

Mannok PIR Insulation does not rot and does not support mould or fungus. Mannok PIR Insulation is chemically inert, and poses no threat to anyone using it.

## Technical Support

All as per IsoFrame

Mannok provides a comprehensive technical support service for designers and contractors.

**Mannok can provide:**

- copies of Agrément and test certificates
- U-value calculations
- interstitial risk calculations
- design advice
- guidance on the most effective ways to meet current Building Regulations and Building Standards.

**Contact Technical Support:**

- Call: +44 (0) 28 6774 8866
- Email: [technical@mangkokbuild.com](mailto:technical@mangkokbuild.com)

## Physical & Performance Characteristics

Surface	Composite foil facings
Edge:	T&G
Thicknesses:	90, 115 & 140mm
Length x width:	1200mm x 450mm
Thermal conductivity	0.022W/mK
Core water vapour resistivity	≈300MNs/gm
Compressive strength:	>140kPa

## Fire Performance

Thickness	BS 476-7	BS EN 13501-1
90 - 140mm	Class 1	Euroclass F

## Dimensional stability / Durability

When tested to EN 1604 Mannok PIR Insulation achieves level DS(TH)4 to EN 13165.

Mannok PIR Insulation will perform for the service life of the building.

## Design and Installation

For design and installation information plus thicknesses of Mannok Therm IsoCavity to achieve specific U-values in all cavity wall applications, consult our Product & Installation Guide, available via our website.

**For further information:**

Mannok, Derrylin, Co. Fermanagh, Northern Ireland BT92 9GP

t: +44 (0) 28 6774 8866 | [www.mangkokbuild.com](http://www.mangkokbuild.com) | [info@mangkokbuild.com](mailto:info@mangkokbuild.com)



Every effort has been taken in the preparation of this data sheet to ensure the accuracy of representations contained herein. Recommendations as to the use of materials, construction details and methods of installation are given in good faith and relate to typical situations. However, every site has different characteristics and reliance should not be placed upon the foregoing recommendations. Advice can be given as to specific applications of the products, upon request to Mannok.