



## Loft Roll Ultra




ODE Loft Roll is a glass mineral wool roll with a superior thermal performance of 0.042, designed to be installed in cold loft spaces at ceiling level.

ODE The roll is pre-cut at 570mm for ease of installation between ceiling joists.

### Key Performances and Benefits

Reaction to Fire classification	A1 non-combustible to EN 13501-1
Thermal conductivity (W/mk)	0.042
BREEAM	A+ rating according to BRE Green Guide
Recycled content	Manufactured from >80% recycled glass
Easy installation	No tear, low wastage, pre-cut for easy fit between joists
Long Life	Does not degrade, decompose, or become mouldy over time

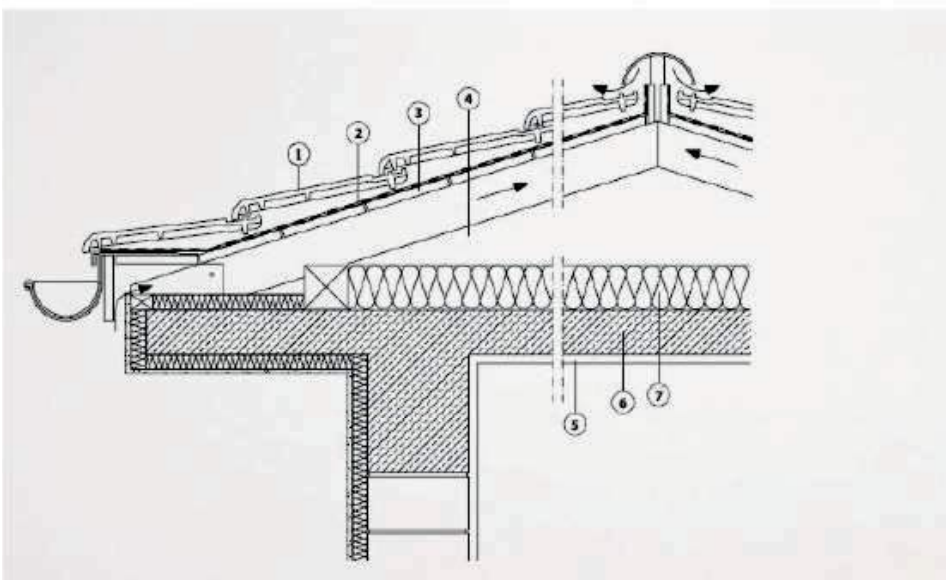

- 1 - Roof Covering
- 2 - Waterproofing
- 3 - Roof Board
- 4 - Ventilated Attic Space
- 5 - Ceiling
- 6 - Floor Panel
- 7 - Insulation Material

## Specifications

Thickness mm	Thermal Conductivity (W/mk)	Length M	Width mm	M2 Per Pack	Packs Per Palet
100	0.042	9.5	1140 (2x570)	10.83	24
150	0.042	7	1140 (2x570)	7.98	24
200	0.042	6	1140 (2x570)	6.84	24

## Hyperpack Palletized Packaging

Thanks to the hyperpack packaging system, ODE Lunaflex glass wool facilitates:

- Loading more product per volume
- Loading and unloading using transpallet
- Minimum stocking cost
- Can be stored outdoors



More information and certification documents at [www.ode.com.tr/en](http://www.ode.com.tr/en)

ISO 27001 | ISO 9001 | ISO 14001 | ISO 50001 | ISO 45001

